



Category 5e Shielded RJ-45 Tool-Less Keystone Jacks

Transmission and Electrical Specifications								Typical Return Loss (Forward, Component Level)	
Frequency MHz	Insertion Loss dB		NEXT Loss dB		FEXT Loss dB		RL dB		
	Nom	Max	Nom	Min	Nom	Min	Nom	Min	
	1.00	0.02	0.10	85.0	65.0	77.0	65.0	55.0	30.0
4.00	0.03	0.10	75.0	65.0	65.0	63.1	50.0	30.0	
8.00	0.04	0.11	70.0	64.9	60.0	57.0	48.0	30.0	
10.00	0.04	0.13	68.0	63.0	58.0	55.1	42.0	30.0	
16.00	0.05	0.16	64.0	58.9	54.0	51.0	40.0	30.0	
25.00	0.06	0.20	60.0	55.0	50.0	47.1	35.0	30.0	
31.25	0.07	0.22	58.0	53.1	48.0	45.2	33.0	30.0	
62.50	0.11	0.32	52.0	47.1	42.0	39.1	28.1	24.1	
100.00	0.15	0.40	45.0	43.0	38.0	35.1	24.0	20.0	

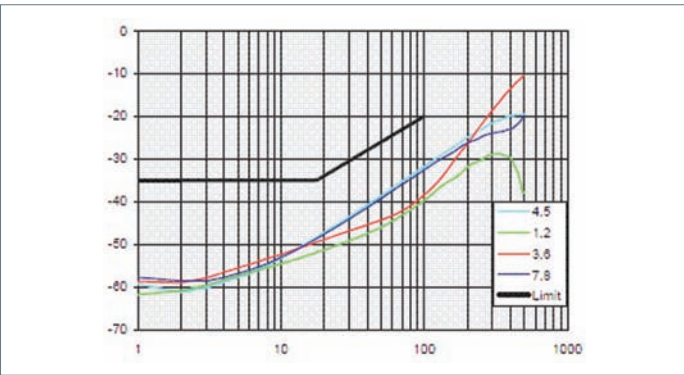

Propagation Delay	2.5 nS max @ 1-100 MHz
Propagation Delay Skew	1.25 nS max @ 1-100 MHz
Current rating	1.5 A max.
Contact resistance	20 mOhm max (per contact)
Input/Output resistance	200 mOhm max
Input/Output resistance Unbalance	50 mOhm max
Voltage rating	72 Vdc max
Dielectric strength	1000 Volts rms for 1 minute
Insulation Resistance	500 MegaOhm min @ 500 Vdc
DC Resistance	0.1 Ohm max @ 20C
TCL	28-20-Log(f/100) dB min @ 1-100 MHz
Transfer Impedance	0.1 Ohm @ 1 MHz, 0.2 Ohm @ 10 MHz, 1.6 Ohm @ 80 MHz max.

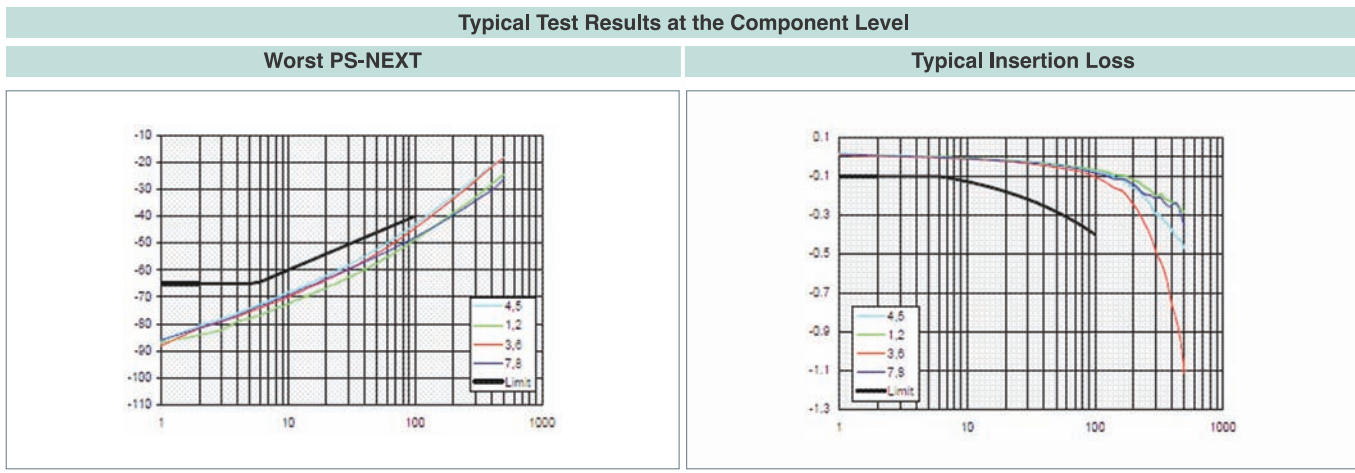

Ordering Information		
HCS P/N	Description	T568
J5E-00861	8P8C RJ-45 Shielded Tool-Hess Keystone Jack CAT 5e	B
J5E-00862	8P8C RJ-45 Shielded Tool-Hess Keystone Jack CAT 5e	A
J5E-00863	8P8C RJ-45 Shielded Tool-Hess Keystone Jack CAT 5e	Universal